Via stazione 22/A, I-39035 Monguelfo (BZ)
Tel. +39 0474 947 200, Fax 947 299
www.rema-online.it E-mail info@rema-online.it

CORNER

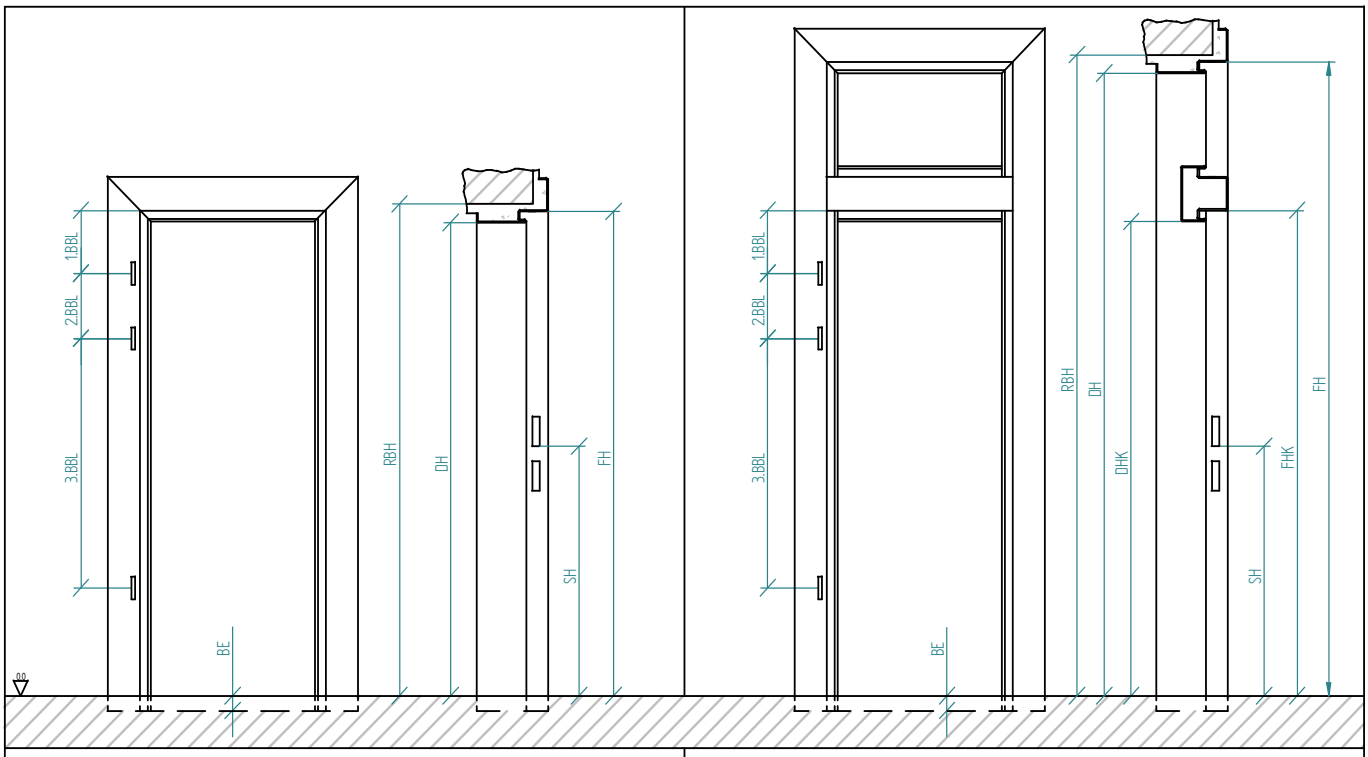

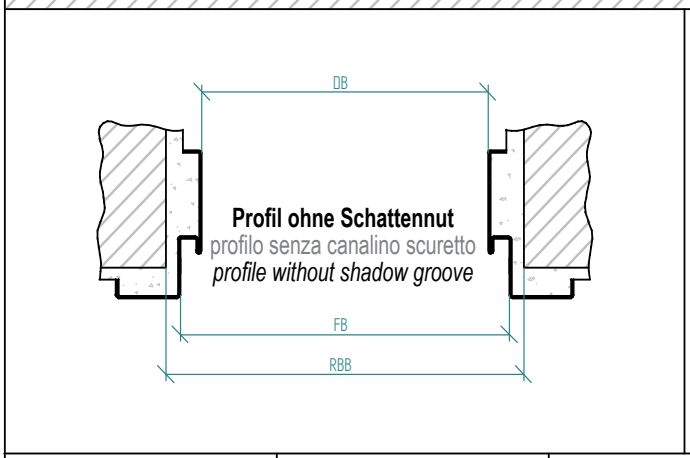

Profil ohne Schattennut
profilo senza canalino scuretto
profile without shadow groove

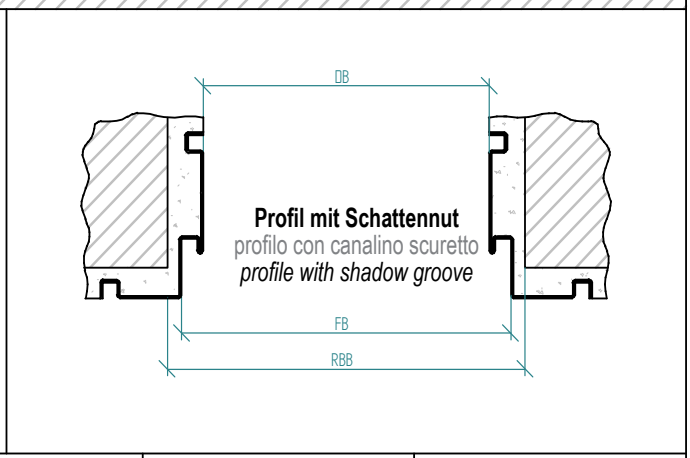

Profil mit Schattennut
profilo con canalino scuretto
profile with shadow groove

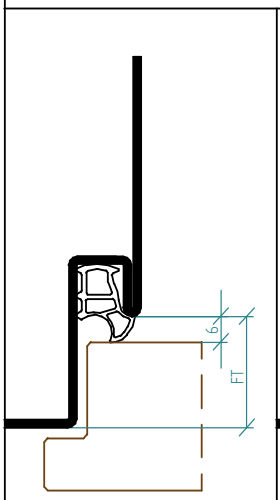

gefälztes Türblatt
porta con battuta
rebated door

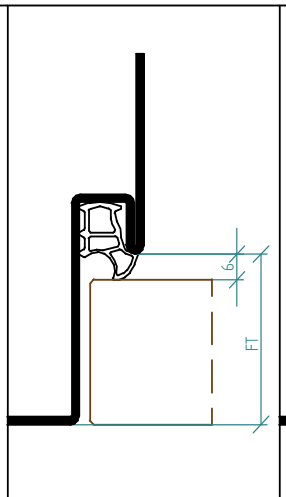

stumpfes Türblatt
porta a filo senza battuta
flush door

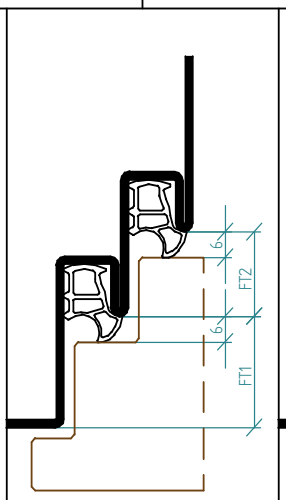

doppelt gefälztes Türblatt
porta a doppia battuta
double rebated door

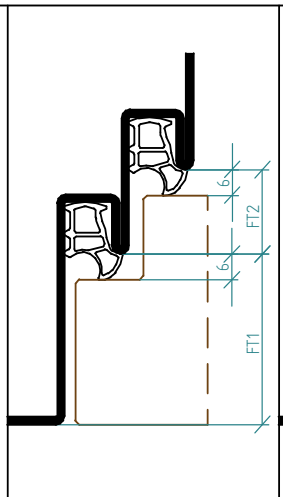

stumpf gefälztes Türblatt
porta a filo con battuta
flush rebated door

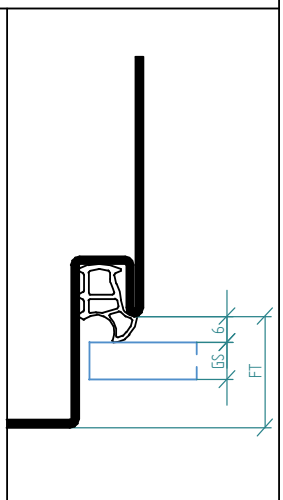

Ganzglastür
porta in cristallo
glassdoor

rema

Via stazione 22/A, I-39035 Monguelfo (BZ)
Tel. +39 0474 947 200, Fax 947 299
www.rema-online.it E-mail info@rema-online.it

Anfrage- / Bestellformular
modulo di richiesta / ordine
request / order form

CORNER

Client:	**Destination:**
Adress:	site or client adress:
VAT No.:	
Tel.: Fax. :	
e-mail	
Contact:	e-mail
Project:	Tel.: Fax. :
Requested delivery date:_____	Contact: Mobile:

1.) Material
__ galvanized steel 1,5 mm
__ galvanized steel 2,0 mm
__ stainless steel AISI 304 1,5 mm
__ stainless steel AISI 316 1,5 mm
__ others _____

2.) Surface
__ raw
__ primed (RAL 9010)
__ powder coated RAL _____
__ smooth-glossy
__ smooth-matte
__ finetexture-semigloss
__ finetexture-matte
__ others _____

3.) Doortype
__ rebated 25,5 mm or _____
__ flush door 40 mm or _____
__ double rabeted FT1 _____ FT2 _____
__ double rebated flush door FT1 _____ FT2 _____
__ glass door _____ (8-10)

4.) Hinge prepairing
__ V8600
__ VX 7511 3D
__ VN 7608 120 3D
__ VN 7608 160 3D
__ others _____

5.) Hinge positions
__ 1.BBL 241 mm 2.BBL 1435 mm
__ 1.BBL 241 mm 2.BBL 1560 mm
__ 1.BBL _____ mm 2.BBL _____ mm
__ 3.BBL _____ mm 3.BBL 250 mm
__ 3.BBL central _____ __ 4.BBL _____ mm

6.) Lock prepairing
__ 62-23-62 con with registrable strike plate
__ others _____

7.) Depth of lock prepairing (ST)
__ for rebated door ST=4 mm or _____mm
__ fur flush door ST=15,5 mm or _____mm

8.) Hight of lock prepairing (SH)
__ 1050 mm
__ others _____

9.) Fixing systems
__ special brackets for concrete walls
__ special anchors for stud walls
__ clamb and Rapid Block for SPEED
__ regolable anchor for TELESCOP / S2
__ others _____

10.) Transom-bar for overlight frame
__ yes __ no
__ transom in aluminium 45-75
__ bended transom in steel : type _____

11.) Glazing bead for fanlight
__ clip bead 15x15mm in aluminium
__ steel tube bead ___x15mm to screw
__ others _____

12.) Glass thickness for fanlight
_____mm

13.) Color of rubber seal C 1397
__ grey
__ black
__ white
__ brown

14.) Floor height (BE)
__ no
__ yes: _____mm

15.) Extras
__ no
__ yes: _____

16.) Hinge supply
__ yes __ no
hinge type _____

17.) Drawings
__ yes __ no
drawing nr.: _____

pos.	profile type	MW	__ wall opening : RBB / RBH __ frame-rebate dimenssion : FB / FH __ open size of frame : DB / DH widht	height	height of transom for fanlight DHK	handing DIN L	R	2 doors	quantity total	EXTRA	price

order nr._____ date:_____ signature : _____